

I2C SLAVE CONTROLLER

Name		Description
CC-I2C_SLV-APB		I2C Slave Controller with APB Interface
Category	Type	Status
Serial/Parallel Interfaces	I2C	Silicon and FPGA Proven
Deliverables		
<ul style="list-style-type: none"> ◆ Unencrypted RTL code ◆ User manual ◆ Testbench 	<ul style="list-style-type: none"> ◆ C header file ◆ Support 	
Features		
<ul style="list-style-type: none"> ◆ I2C-compatible interface ◆ AMBA APB3 bus ◆ Configurable setup/hold times ◆ Automatic clock stretching support ◆ Programmable SDA/SCL input filter ◆ Automatic Acknowledge support ◆ Dual addressing capability ◆ General call address recognition ◆ 7 and 10 bit addressing format support 	<ul style="list-style-type: none"> ◆ Maskable interrupts ◆ Dedicated upstream and downstream ◆ DMA interface ◆ Fully synthesizable synchronous design with positive edge clocking ◆ DFT ready ◆ Technology independent IP Core ◆ Flexible licensing scheme 	



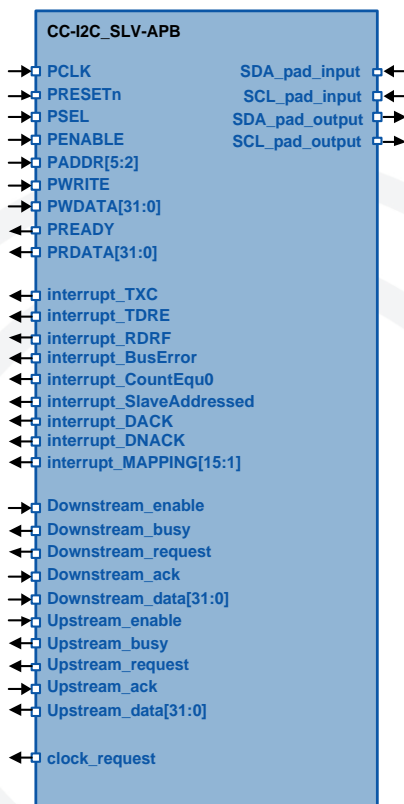


Figure 1. Symbol.



a) Using clock_request pin for low power mode

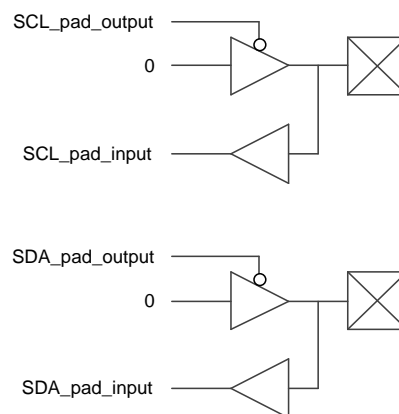

b) Pad connection example

Table 1. Pin description.

Pin name	Direction	Active	Description
PCLK	I	rising	Synchronous clock
PRESETn	I	low	Asynchronous reset
PSEL	I	high	APB peripheral select
PENABLE	I	high	APB bus enable
PADDR[5:2]	I	data	APB bus address
PWRITE	I	high	APB bus write
PWDATA[31:0]	I	data	APB bus write data
PREADY	O	high	APB bus ready
PRDATA[31:0]	O	data	APB bus read data
interrupt_TXC	O	high	Transmission complete interrupt
interrupt_TDRE	O	high	Transmit data register empty interrupt
interrupt_RDRF	O	high	Read data register full interrupt
interrupt_DNACK	O	high	Data NACK received interrupt
interrupt_DACK	O	high	Data ACK received interrupt
interrupt_CountEQ0	O	high	Count equals zero interrupt
interrupt_SlaveAddressed	O	high	Module addressed interrupt
interrupt_BusError	O	high	Protocol error interrupt
interrupt_ArbitrationLost	O	high	Arbitration lost interrupt
interrupt_MAPPING[15:1]	O	data	Interrupt mapping vector
Downstream_enable	I	high	PDMA downstream enable signal
Downstream_busy	O	high	PDMA downstream busy signal
Downstram_request	O	high	PDMA downstream request signal
Downstream_ack	I	high	PDMA downstream ack signal
Downstream_data[31:0]	I	data	PDMA downstream data
Upstream_enable	I	high	PDMA upstream enable signal
Upstream_busy	O	high	PDMA upstream busy signal
Upstram_request	O	high	PDMA upstream request signal
Upstream_ack	I	high	PDMA upstream ack signal
Upstream_data[31:0]	O	data	PDMA upstream data
clock_request	O	high	Clock request signal
SDA_pad_input	I	As I2C spec.	I2C data pin input
SCL_pad_input	I	As I2C spec.	I2C clock pin input
SDA_pad_output	O	As I2C spec.	I2C data pin output
SCL_pad_output	O	As I2C spec.	I2C clock pin output

Table 2. Generic Parameters.

Generic name	Type	Range	Description
PDMA_support	integer	0, 1	Configure PDMA interface support
i2cCountWidth	integer	1:32	Configure data counter width
I2cSignalSampleCountWidth	integer	1:32	Configure input sample counter width
dual_address_support_enable	integer	0, 1	Configure support for secondary address reconfiguration
interface_input_synchronization_enable	integer	0, 1	Configure SDA and SCL synchronizing flip flips
interface_inputs_filter_enable	integer	0, 1	Configure SDA and SCL input filter
default_interrupt_MAPPING	integer	0:32767	Reset value of interrupt_MAPPING register